

NAIL AND SCALE

MATERIAL ESTIMATE



PROJECT NAME



DATE



CLIENT / BUILDER NAME



CLIENT CONTACT



PROJECT ADDRESS



PREPARED BY



JOB NUMBER



PHONE / EMAIL



NOTES

SFR With Detached ADU

Tracking #

Itemized List

Client / PO#


Report Time 6/29/2026 12:27 PM

Estimator Nate Poland

Arch. Date n/a Struct. Date n/a



Line #	Quantity	Product Description	Product Application
<u>1st Floor Walls/Posts SFR Materials</u>			
1	193	2x6x104-5/8" DF Stud	Exterior Stud
2	404	2x6 R/L DF #2	Exterior Plate
3	192	2x6 R/L #2 Treated	Exterior Bottom Plate
4	49	7/16"x4'x9' OSB	Exterior Sheathing
5	2	2x6x12' DF Stud	Interior Stud
6	13	2x6x104-5/8" DF Stud	Interior Stud
7	3	2x6x8' DF Stud	Interior Stud
8	179	2x4x104-5/8" DF Stud	Interior Stud
9	44	2x6 R/L DF #2	Interior Plate
10	372	2x4 R/L DF #2	Interior Plate
11	22	2x6 R/L #2 Treated	Interior Bottom Plate
12	178	2x4 R/L #2 Treated	Interior Bottom Plate
13	3	2x8x12' DF #2	Header
14	4	2x8x10' DF #2	Header
15	4	2x8x8' DF #2	Header
16	7	7/16"x4'x8' OSB	Wall Sheathing
17	1	5-1/2"x11-7/8"x7' Glulam	Beam
<u>Roof SFR Materials</u>			
18	14	1/2"x4'x8' CCX	Roof Decking
19	72	1/2"x4'x8' OSB	Roof Decking
20	1	2x4x12' DF #2	Outlooker
21	17	2x4x8' DF #2	Outlooker
22	15	2x6x16' Combed Primed	Fascia
23	344	PSCL 1/2 Simpson Strong Tie	Misc. Connector
<u>Misc. SFR Materials</u>			
24	936	2x4 R/L DF #2	Bracing
25	2	5-1/2" x 100' Sill Seal	Sill Seal
26	58	2"x4"x22-1/2" Pre-Cut Eave Blocking	Truss Blocking
<u>1st Floor Walls/Posts ADU Materials</u>			
27	131	2x6x104-5/8" DF Stud	Exterior Stud
28	272	2x6 R/L DF #2	Exterior Plate
29	130	2x6 R/L #2 Treated	Exterior Bottom Plate
30	33	7/16"x4'x9' OSB	Exterior Sheathing
31	2	2x6x12' DF Stud	Interior Stud
32	7	2x6x104-5/8" DF Stud	Interior Stud
33	4	2x6x8' DF Stud	Interior Stud
34	116	2x4x104-5/8" DF Stud	Interior Stud
35	36	2x6 R/L DF #2	Interior Plate
36	240	2x4 R/L DF #2	Interior Plate
37	18	2x6 R/L #2 Treated	Interior Bottom Plate
38	116	2x4 R/L #2 Treated	Interior Bottom Plate
39	1	2x8x14' DF #2	Header
40	1	2x6x18' DF #2	Header
41	5	2x6x8' DF #2	Header
42	4	7/16"x4'x8' OSB	Wall Sheathing
<u>Roof ADU Materials</u>			
43	8	1/2"x4'x8' CCX	Roof Decking
44	38	1/2"x4'x8' OSB	Roof Decking

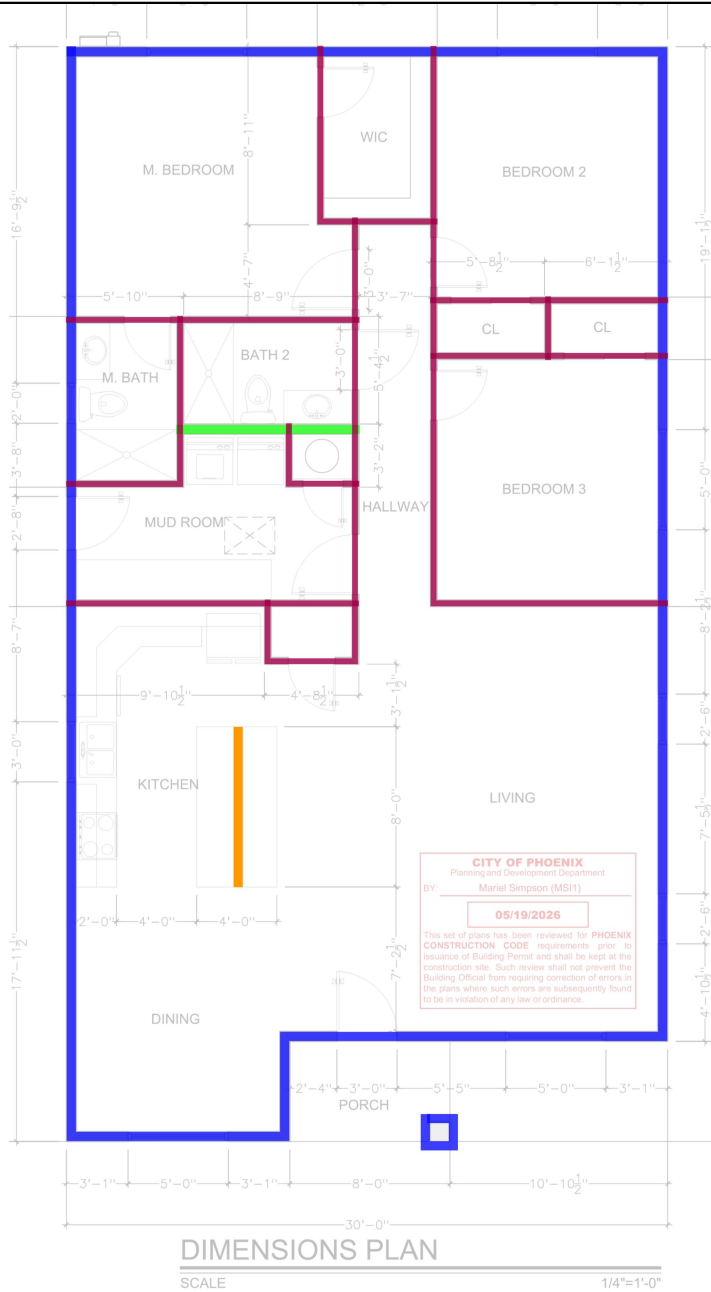

Tag	Qty	Product	Len	Cut Logic
Exterior Stud				
	193	2x6x104-5/8" DF Stud		
Exterior Plate				
	404	2x6 DF #2	R/L	
Exterior Bottom Plate				
	192	2x6 #2 Treated	R/L	
Exterior Sheathing				
	49	7/16"x4'x9' OSB		
Interior Stud				
	179	2x4x104-5/8" DF Stud		
	13	2x6x104-5/8" DF Stud		
	2	2x6 DF Stud	12	2/12
	3	2x6 DF Stud	8	3/8
Interior Plate				
	372	2x4 DF #2	R/L	
	24	2x6 DF #2	R/L	
	20	2x6 DF #2	R/L	
Interior Bottom Plate				
	178	2x4 #2 Treated	R/L	
	12	2x6 #2 Treated	R/L	
	10	2x6 #2 Treated	R/L	



Studs SFR

The layouts shown reflect our interpretation of the project information received and are provided solely to assist with correct product selection. We do not warrant the accuracy of the information provided. Final responsibility for confirming coordination and suitability of these drawings within the overall project lies with the design professional of record and/or the builder/ framing contractor.

plans@nailandscale.com

Estimator: Nate Poland

Tracking:

Sheet 1 of 1



Tag	Qty	Product	Len	Cut Logic
Wall Sheathing		7/16"x4"x8' OSB		



Nail and Scale
Gable Sheathing SFR

The layouts shown reflect our interpretation of the project information received and are provided solely to assist with correct product selection. We do not warrant the accuracy of the information provided or the results of the required design services. Final responsibility for confirming coordination and suitability of these drawings within the overall project lies with the design professional of record and/or the builder/ framing contractor.

plans@nailandscale.com

Estimator: Nate Poland

Tracking: